

## DAFA Duo Foil lining foil

DAFA Duo Foil lining foil is a part of DAFA AirStop System and is used for both external and internal sealing of windows and doors.

DAFA Duo Foil lining foil is an intelligent foil membrane which can be used for both internal and external sealing of windows and doors thanks to DAFA Duo Foil lining foil's variable diffusion properties.

DAFA Duo Foil lining foil is scratch-resistant and ensures an all-in-one operation, eliminating the need for difficult and time-consuming corner joints.

The tape can also adhere on both sides, making the procedure considerably easier. Use foil adhesive for joining to all horizontal surfaces where DAFA Duo Foil lining foil is used.

DAFA Duo Foil lining foil is the perfect seal for under terrace doors in multi-storey buildings for example. It adheres to concrete, plastic, wood and all types of building materials.

DAFA Duo Foil lining foil keeps moisture away from the structure and reduces the risk of mildew appearing.

### Product benefits

- Can be used internally and externally
- Variable diffusion properties
- Adheres on both sides
- Time-saving
- All-in-one operation making 10-year system guarantee obtainable
- Reduces the risk of mildew formation


DAFA Duo Foil lining foil offers a 10-year system guarantee on illbrucks i2 and i3 system joints. The guarantee covers internal and external joints and intermediate insulation.



DAFA Duo Foil lining foil is a flexible foil, as it is equipped with a fold that allows the tape's width to increase, thus allowing for unexpected building tolerances.



In alliance with  Insurance Solutions

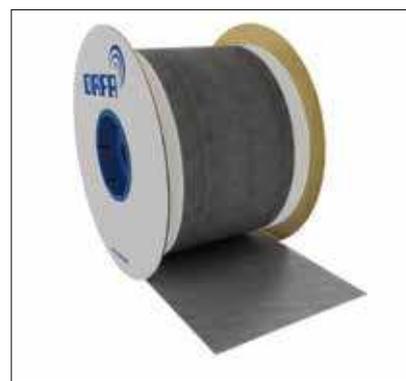

Duo Foil lining foil.

Read more at [www.dafa-as.com](http://www.dafa-as.com)

| Dimensions | Contents per box / roll |
|------------|-------------------------|
| 130-160 mm | 3 rolls of 50 m         |
| 180-210 mm | 2 rolls of 50 m         |
| 220-250 mm | 1 roll of 50 m          |



DAFA Duo Foil lining foil in window structure.

| Technical specifications |        |   |
|--------------------------|--------|---|
|                          | DIN    | CLASSIFICATION  |
| Flammability             | 4102   | B2, P-NDS04-594   |
| Vapour diffusion         | 4108-3 | Sd value between 0.21 m and 15 m depending on the average air humidity. Intelligent vapour barrier. |
| Adhesiveness for butyl   |        | 12 N / 25 mm  |
| Self-adhesiveness        |        | 12 N / 25 mm  |
| Temperature resistance   |        | -40° C to +100° C   |
| Installation temperature |        | +5° C to +45° C   |
| Shelf-life               |        | One year  |